

# Speed Queen® Multi-Housing

## Electronic Commercial Stack Washer/Dryer

Front Control




ENERGY STAR® Certified  
Washer

### BUILT FOR RELIABLE PERFORMANCE

- U.S. DOE compliance for energy and water efficiencies
- ADA compliant (washer only)
- Suspension with out-of-balance logic
- Industry leading 1200 spin speed exerts 440 G-force extraction
- Extra-wide 15.5" door opening and 180° door swing
- Four compartment supply dispenser
- Industry's largest door opening 2.06 sq. ft. (1914 cm<sup>2</sup>)
- Quiet, efficient blower system
- End-of-cycle signal
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured


### ELECTRONIC CONTROL

- Uses less energy
- Touch pad selection combines temperature and cycle

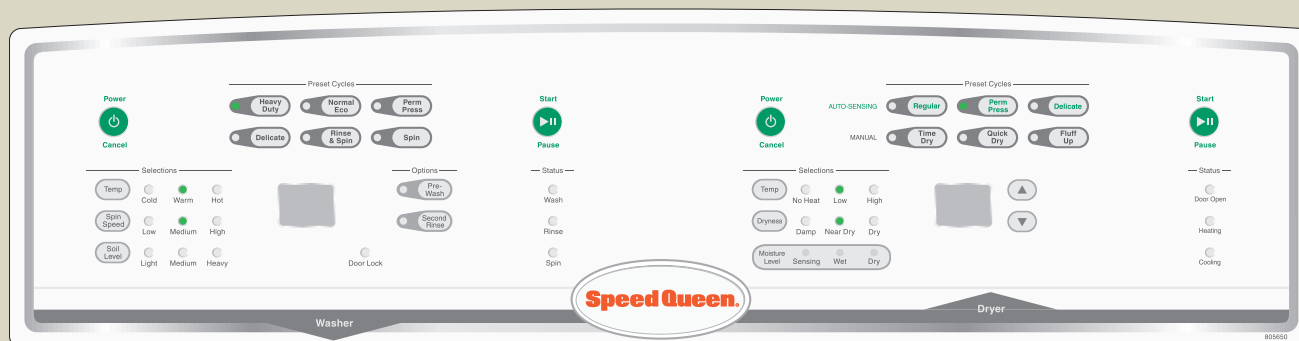

# ELECTRONIC COMMERCIAL **STACK WASHER/DRYER** SPECIFICATIONS


<b>MODELS</b>	<b>Elec</b>	<b>LTEE5ASP153TW01</b>
	<b>Elec</b>	<b>LTEE5ASP173TW01</b>
	<b>Gas</b>	<b>LTGE5ASP113TW01</b>



<b>Appearance</b>		
<b>Color</b>	<b>White</b>	
<b>Control Panel Selection</b>	<b>Front</b>	
<b>Water and Energy Info</b>		
Modified Energy Factor "MEF" ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle)	2.38 (82.29)	
Water Factor "WF" - gal/ft <sup>3</sup> (Liters/Liter/cycle)	3.7 (0.5)	
Water Consumption - gal (Liter)	11.7 (44.3)	
<b>Technical Info</b>		
Weight - lb (kg)	390 (177)	
Shipping Weight - lb (kg)	425 (193)	
Electrical Requirements*	Elec	120/208/60/1 30 amp 120/240/60/1 30 amp
	Gas	120/60/1 15 amp
Overall Dimensions - WxDxH in (mm): 26 7/8 (683) x 27 3/4 (704) x 78 3/16 (1986)		
<b>Washer - Stainless Steel Basket Volume - cu. ft. (liters): 3.42 (96.8)</b>		
Motor	0.9 HP 671 W	
Water Pressure PSI (Bar)	20-120 (1.4-8.3)	
Spin Speeds - RPM	500, 800, 1200	
Drain	Pump	
<b>Dryer - Galvanized Cylinder Volume - cu. ft. (liters): 7.0 (198)</b>		
Air Outlet Diameter - in (mm)	4 (102)	
Exhaust Airflow - cfm (liters/sec)	220 (105)	
Cycle Temperatures - Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up		
Heating Element	Elec	5350W, 240V
	Gas	25,000 Btu
Motor	1/3 HP, 5.5 amps	
<b>Performance/Features</b>		
Top and Lower Unit Factory Assembled	Yes	
Agency Approval	Elec	cULus
	Gas	cCSAus

\* Electric dryers come equipped for 120/240/60/1 operation. They can be field converted to operate on 120/208/60/1 with optional 61928 conversion kit.  
 \*\* Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

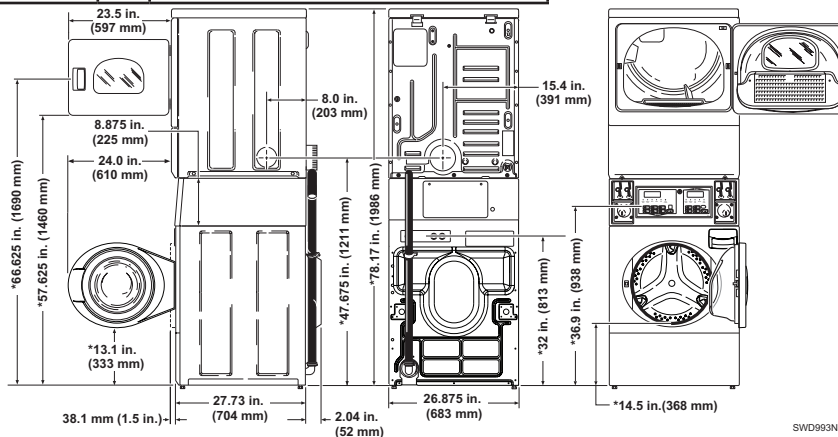

\*With leveling legs turned into base.  
 NOTE: Exhaust openings are 10.2 mm (4 inch) metal ducting.

SWD993N

