

Speed Queen®

MULTI-HOUSING


Push-To-Start
Commercial Washers & Dryers



BUILT FOR RELIABLE PERFORMANCE.

Our push-to-start control line features top load washers that offer the flexibility of selecting hot, warm and cold wash temperatures and two-speed wash and spin actions. Our single load and stack dryers have four heat/cycle options and time start activation. These units are ideal for military, colleges, restaurants, beauty salons and other special business applications.

PUSH-TO-START controls provide easy push-to-start activation indicated by "In Use" light.

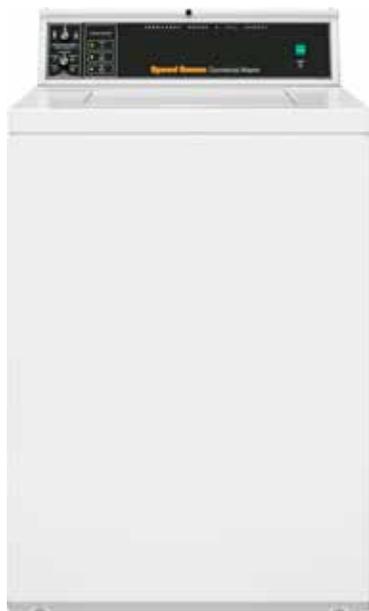


TOP LOAD WASHER

The Speed Queen push-to-start activated top load washer gives building owners and property managers unparalleled ability to reduce water and energy costs. The top load washer has met every design standard to be Department of Energy compliant to commercial washer standards for energy and water savings.

710 RPM final spin to maximize moisture removal from clothes. Automatic balancing suspension system provides the industry's best out-of-balance handling, completing wash cycles without interruption.


Durable stainless steel and porcelain enamel wash tub. Four-vane polypropylene agitator provides 210° agitation stroke that will deliver superior washability for all load sizes.

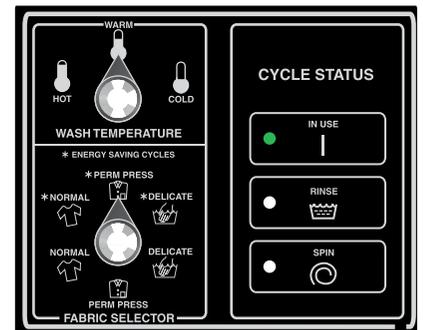

SINGLE LOAD DRYER



Speed Queen's single load dryers combine heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Our cabinet design maintains the perfect balance of heat, airflow and tumble action for optimal performance and efficiency. The dry cycle is efficient and fast with settings from 0 to 60 minutes available. Customers have the flexibility to choose from four heat/cycle selections.

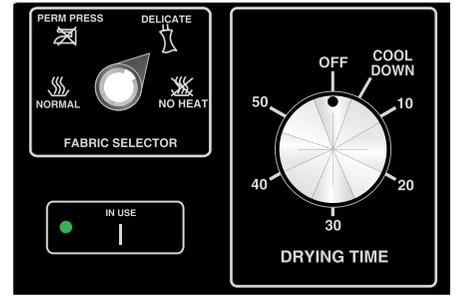

Durable galvanized steel cylinder. Superior drying convenience including the industry's largest door opening 2.06 sq. ft. (1914 cm²).

Efficient dryer heating with 25,000 BTU (gas models) and up to 5,350 Watts (electric models). Speed Queen dryers offer some of the fastest drying times in the industry. Upfront lint filter is easy to clean and secured. Reversible door for installation flexibility.

STACK DRYER

The Speed Queen stack dryer offers the same great features as the single load dryer. Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage. Available with see-through or solid door models. ADA Compliant (bottom dryer only).

Graphic arrows on control panel indicate upper and lower pockets.

100% service from the front.



PUSH-TO-START CONTROL COMMERCIAL WASHER & DRYER SPECIFICATIONS

MODELS	Top Load Washer	Single Load Dryer	Stack Dryer
Capacity - lb (kg)	21.5 (9.5)	18 (8.2)	18 (8.2) ea
Cylinder Volume - cu. Ft. (liters)	3.26 (92.3)	7.0 (198)	7.0 (198) ea
Width - in (mm)	25 5/8 (651)	26 7/8 (683)	26 7/8 (683)
Depth - in (mm)	28 (711)	28 (711)	28 (711)
Height - in (mm)	43 (1092)	43 (1092)	78 3/16 (1986)
Spin Speed G-Force (RPM)	474, 710	N/A	N/A
Motor Size - HP (kw)	1/2 HP (2 speed)	N/A	N/A
Water Consumption per Cycle - g (liter)	26.7 (101)	N/A	N/A
WF (Water Factor) gal/ft ³ (Liters/Liter/cycle)	8.4 (1.12)	N/A	N/A
MEF (Modified Energy Factor) ft ³ /kWh/cycle (Liters/kWh/cycle)	1.65 (46.7)	N/A	N/A
Available Heat Sources	N/A	Gas or Electric	
Available Heating Element (Electric W)	N/A	5350 @ 240V 4750W, 208V	5350 @ 240V 4750W, 208V
Gas Inlet Connection (in (mm))	N/A	3/8 (9.5)	3/8 (9.5)
Gas Consumption - BTU/Hr	N/A	25,000	25,000
Exhaust Outlet Dia. - in (mm)	N/A	4 (102)	4 (102)
Exhaust Airflow - cfm (liters/sec)	N/A	220 (105)	220 (105)
Available Water Temperatures	Hot, Warm, Cold	N/A	N/A
Available Cycles	Normal, Perm Press, Delicate	Normal, Perm Press, Delicate, No Heat	
Water Pressure - PSI (Bar)	20-120 (1.4/8.3)	N/A	N/A
Cycle Indicator Lights	Yes	Yes	Yes
Cylinder Finish	Stainless Steel, Porcelain	Galvanized	Galvanized
Available Colors	White	White	White
Door Type (Solid / Window)	N/A	Solid	Solid
Available Electrical Requirements (v/Hz/Ph-Amp)	120/60/1 - 15 Amp	Electric: 120/240/60/1 - 30 Amp* 120/108/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp	
Net Weight - lb (kg)	190 (86)	Electric: 145 (66) Gas 150 (68)	Electric: 265 (120) Gas 275 (125)
Shipping Weight - lb (kg)	210 (95)	Electric: 160 (73) Gas 165 (75)	Electric: 280 (127) 290 (132)
Shipping Width - in (mm)	29 (737)	29 (737)	29 (737)
Shipping Depth - in (mm)	32 3/4 (832)	32 3/4 (832)	32 3/4 (832)
Shipping Height - in (mm)	44 1/4 (1124)	45 1/2 (1156)	80 (2032)
Available Agency Approvals	cULus	Electric: cULus, Gas: cCSAus	Electric: cULus, Gas: cCSAus

NOTE: Each stack dryer pocket requires its own separate power cord. | Stack washer/dryer requires two power cords - One for washer, one for dryer.

* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the USA.



Speed Queen®